



1/6

FIG. 1A

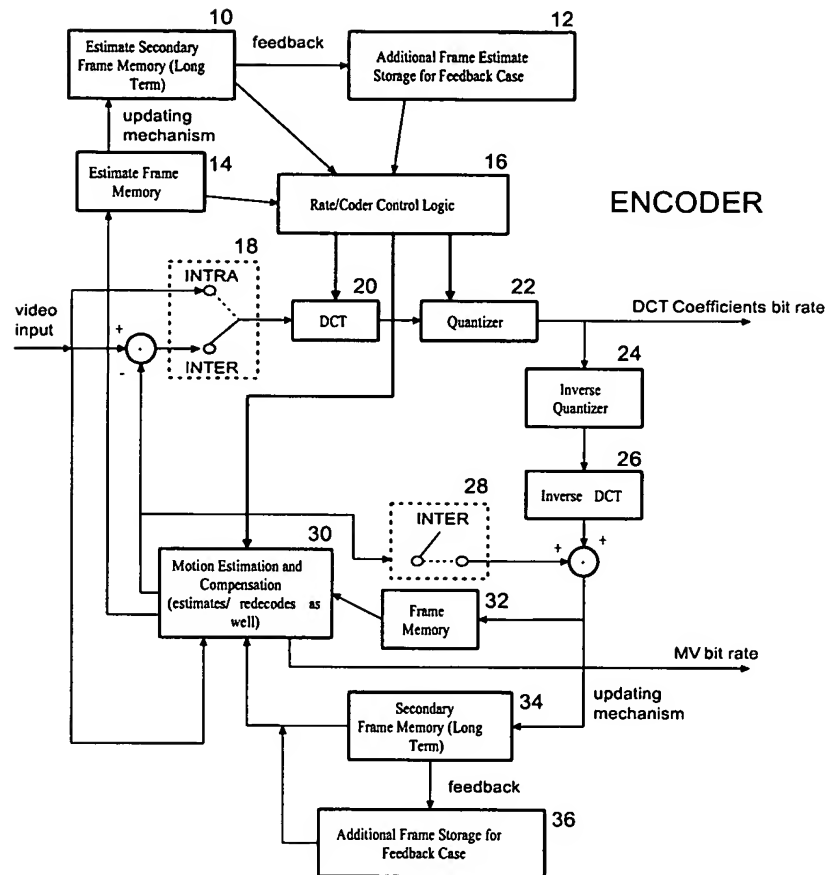

2/6

FIG. 1B

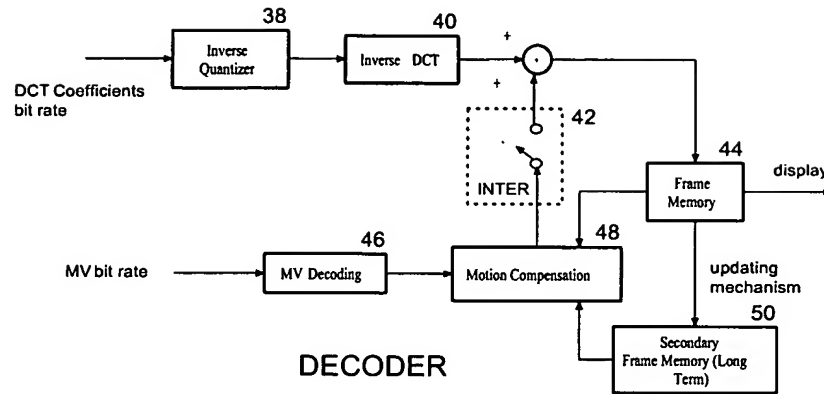

7/7/2005

10/541732

3/6

FIG. 2



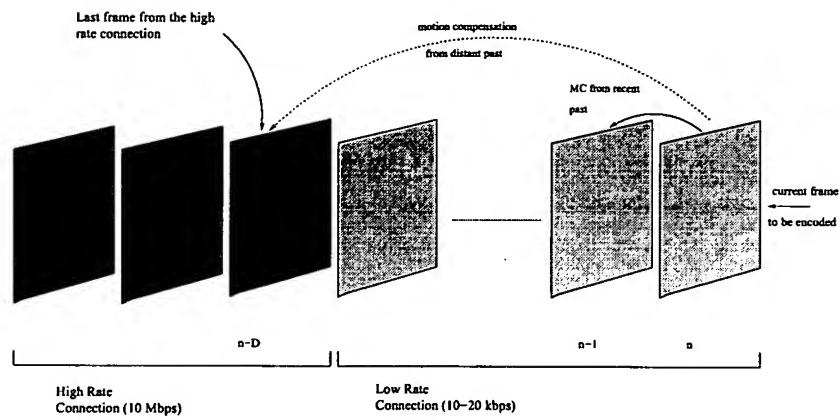


Figure 1 : Dual frame motion compensation example

4/6

FIG. 3A (PRIOR ART)

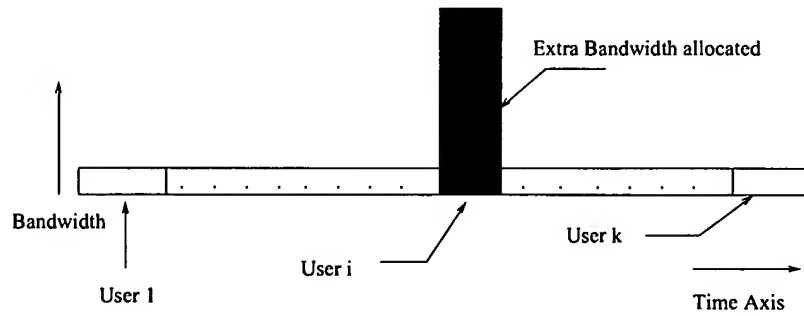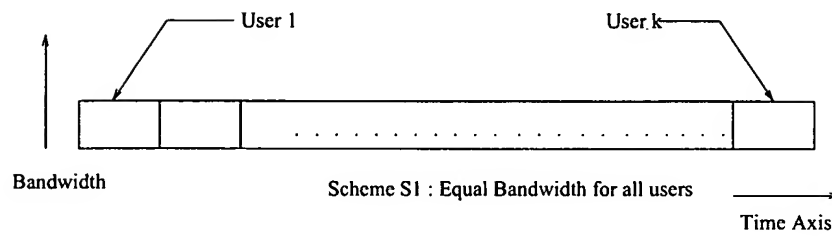


Scheme S2 : Equal Bandwidth for N-1 users, extra bandwidth for user i

FIG. 3B

5/6


FIG. 4

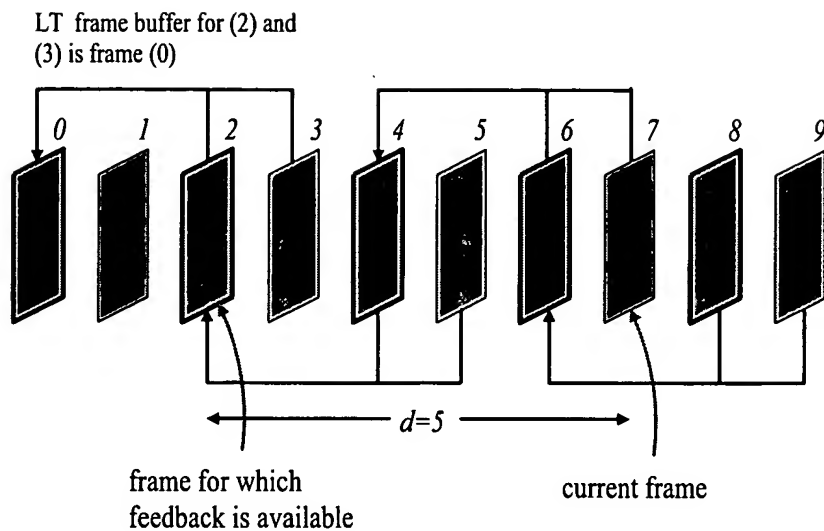

ENCODING METHOD WITH FEEDBACK FOR
PARAMETERS $N=2$, $D=2$ and $d=5$

6/6

FIG. 5

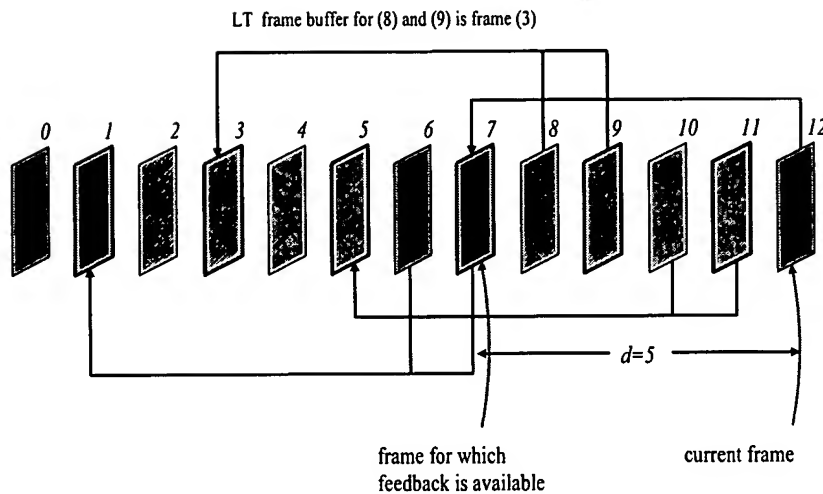

ENCODING METHOD WITH FEEDBACK FOR
PARAMETERS $N=2$, $D=5$ and $d=5$